

Fasadni profilisani lim **TR10**

Profil namenjen oblaganju
zidova industrijskih objektata.

Product is in conformity with the provisions of EC directive 89/106/EEC
(Construction Products Directive) and that the harmonized standard
referenced below has been applied: EN 14782:2006




INM
profiled
plates
www.inm-arilje.com



TEHNIČKI PARAMETRI:

Ulazna širina trake: 1.000 mm
Pokrivna širina: 925 mm
Dužina: do 10.000 mm
Kvalitet trake: DX51D, S280GD,
po standardu EN10346
Nanos cinka: Z100, Z140, Z220,
Z275 po standardu EN10346
Vrste premaza: SP15, SP25, SP35,
PVDF25, PVDF35 po standardu
EN10169
Protivpožarni atest:
A1 po stanardu EN13501-1
Debljine materijala:
0,50, 0,60, 0,70, 0,75 mm
po standardu EN10143
Po potrebi izrađuje se od Al legura,
TiZn materijala kao i od Cu.
Standardne boje:
RAL 9002, 9006, 9007, 3009,
5010, 8019, 6028,7016,
9005DM, 7016DM, 8017DM

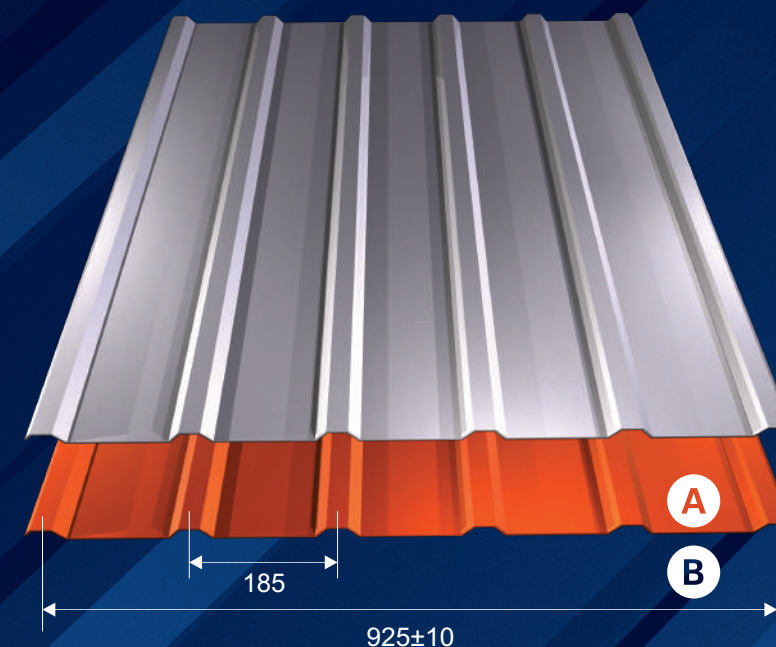

prilikom porudžbine navesti koja će strana biti spoljašnja (A ili B)

