

Fasadni profilisani lim TR18

Profil namenjen oblaganju zidova industrijskih objekata.

Product is in conformity with the provisions of EC directive 89/106/EEC (Construction Products Directive) and that the harmonized standard referenced below has been applied: EN 14782:2006



INM
profiled
plates
www.inm-arilje.com




Može
biti preforiran

DRIPSTOP
Condensation control

TEHNIČKI PARAMETRI:

Ulazna širina trake: 1.250 mm
Pokrivna širina: 1.060 mm
Dužina: do 13.500 mm
Kvalitet trake: DX51D, S280GD, po standardu EN10346
Nanos cinka: Z100, Z140, Z220, Z275 po standardu EN10346
Vrste premaza: SP15, SP25, SP35, PVDF25, PVDF35 po standardu EN10169
Protivpožarni atest: A1 po stanardu EN13501-1
Debljine materijala: 0,50, 0,60, 0,70, 0,75, 0,8 mm po standardu EN10143
Po potrebi izrađuje se od Al legura kao i od TiZn materijala.
Standardne boje: RAL 9002, 9006, 9007, 3009, 5010, 8019, 6028, 7016, 9005DM, 7016DM, 8017DM

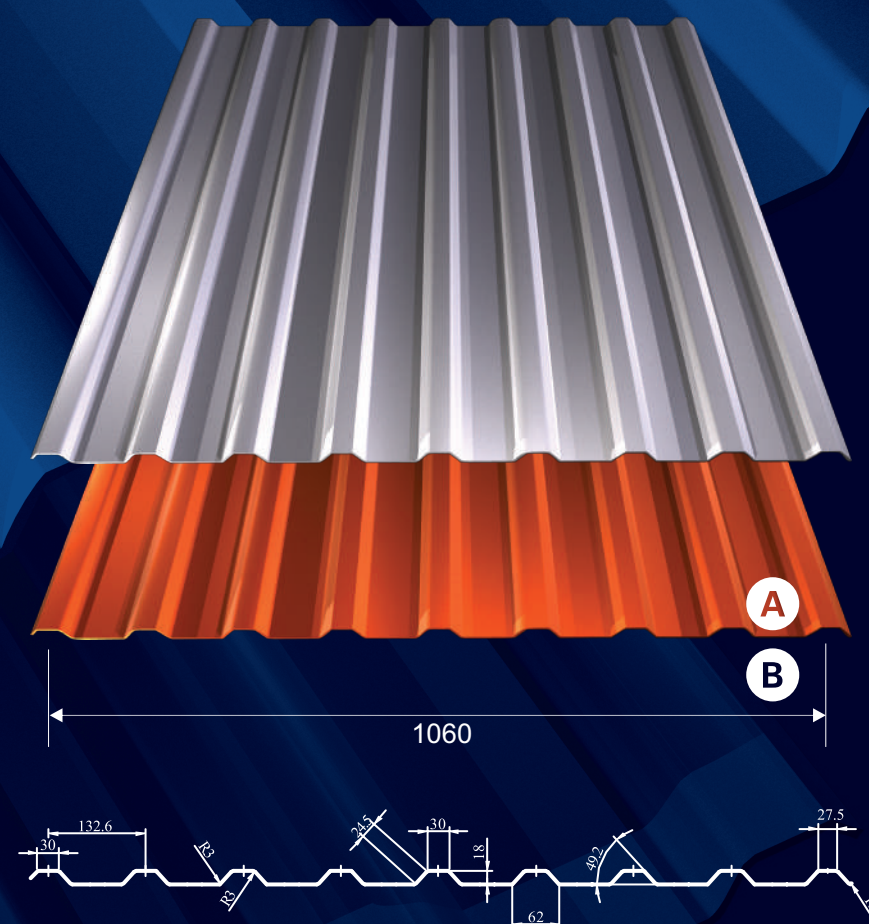

prilikom porudžbine navesti koja će strana biti spoljašnja (A ili B)



DVA OSOLONCA, dopuštena nosivost (kN/m²)									
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.5	TR18/b=1060mm	L/150 L/200 L/300 L/500	5.34	3.01	1.92	1.34	0.98	0.75	0.48
	4.65		5.34	3.01	1.72	0.99	0.63	0.42	0.21
	TR18/b=795mm		5.34	2.52	1.29	0.75	0.47	0.31	0.16
	4.96		3.98	1.68	0.86	0.50	0.31	0.21	0.11
			2.39	1.01	0.52	0.30	0.19	0.13	0.06
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.6	TR18/b=1060mm	L/150 L/200 L/300 L/500	6.39	3.59	2.30	1.60	1.17	0.90	0.57
	5.58		6.39	3.59	2.06	1.19	0.75	0.50	0.26
	TR18/b=795mm		6.39	3.02	1.55	0.89	0.56	0.38	0.19
	5.95		4.77	2.01	1.03	0.60	0.38	0.25	0.13
			2.86	1.21	0.62	0.36	0.23	0.15	0.08
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.7	TR18/b=1060mm	L/150 L/200 L/300 L/500	7.42	4.17	2.67	1.85	1.36	1.04	0.67
	6.51		7.42	4.17	2.40	1.39	0.88	0.59	0.30
	TR18/b=795mm		7.42	3.52	1.80	1.04	0.66	0.44	0.23
	6.94		5.57	2.35	1.20	0.70	0.44	0.29	0.15
			3.34	1.41	0.72	0.42	0.26	0.18	0.09
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.75	TR18/b=1060mm	L/150 L/200 L/300 L/500	7.93	4.46	2.86	1.98	1.46	1.12	0.71
	6.97		7.93	4.46	2.58	1.49	0.94	0.63	0.32
	TR18/b=795mm		7.93	3.78	1.93	1.12	0.70	0.47	0.24
	7.44		5.97	2.52	1.29	0.75	0.47	0.31	0.16
			3.58	1.51	0.77	0.45	0.28	0.19	0.10
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.8	TR18/b=1060mm	L/150 L/200 L/300 L/500	8.44	4.75	3.04	2.11	1.55	1.19	0.76
	7.44		8.44	4.75	2.75	1.59	1.00	0.67	0.34
	TR18/b=795mm		8.44	4.03	2.06	1.19	0.75	0.50	0.26
	7.93		6.36	2.68	1.37	0.80	0.50	0.34	0.17
			3.82	1.61	0.82	0.48	0.30	0.20	0.10

TRI OSOLONCA, dopuštena nosivost (kN/m²)									
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.5	TR18/b=1060mm	L/150 L/200 L/300 L/500	5.34	3.01	1.92	1.34	0.98	0.75	0.48
	4.65		5.34	3.01	1.92	1.34	0.98	0.75	0.48
	TR18/b=795mm		5.34	3.01	1.92	1.34	0.98	0.75	0.40
	4.96		5.34	3.01	1.92	1.24	0.78	0.52	0.27
			5.34	2.52	1.29	0.75	0.47	0.31	0.16
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.6	TR18/b=1060mm	L/150 L/200 L/300 L/500	6.39	3.59	2.30	1.60	1.17	0.90	0.57
	5.58		6.39	3.59	2.30	1.60	1.17	0.90	0.57
	TR18/b=795mm		6.39	3.59	2.30	1.60	1.17	0.90	0.48
	5.95		6.39	3.59	2.30	1.49	0.94	0.63	0.32
			6.39	3.02	1.55	0.89	0.56	0.38	0.19
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.7	TR18/b=1060mm	L/150 L/200 L/300 L/500	7.42	4.17	2.67	1.85	1.36	1.04	0.67
	6.51		7.42	4.17	2.67	1.85	1.36	1.04	0.67
	TR18/b=795mm		7.42	4.17	2.67	1.85	1.36	1.04	0.56
	6.94		7.42	4.17	2.67	1.74	1.10	0.73	0.38
			7.42	3.52	1.80	1.04	0.66	0.44	0.23

TRI OSOLONCA, dopuštena nosivost (kN/m²)									
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.75	TR18/b=1060mm	L/150 L/200 L/300 L/500	7.93	4.46	2.86	1.98	1.46	1.12	0.71
	6.97		7.93	4.46	2.86	1.98	1.46	1.12	0.71
	TR18/b=795mm		7.93	4.46	2.86	1.98	1.46	1.12	0.60
	7.44		7.93	4.46	2.86	1.86	1.17	0.79	0.40
			7.93	3.78	1.93	1.12	0.70	0.47	0.24
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.8	TR18/b=1060mm	L/150 L/200 L/300 L/500	8.44	4.75	3.04	2.11	1.55	1.19	0.76
	7.44		8.44	4.75	3.04	2.11	1.55	1.19	0.76
	TR18/b=795mm		8.44	4.75	3.04	2.11	1.55	1.19	0.64
	7.93		8.44	4.75	3.04	1.99	1.25	0.84	0.43
			8.44	4.03	2.06	1.19	0.75	0.50	0.26

ČETIRI OSOLONCA, dopuštena nosivost (kN/m²)									
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.5	TR18/b=1060mm	L/150 L/200 L/300 L/500	6.68	3.76	2.40	1.67	1.23	0.94	0.60
	4.65		6.68	3.76	2.40	1.67	1.21	0.81	0.41
	TR18/b=795mm		6.68	3.76	2.40	1.44	0.90	0.61	0.31
	4.96		6.68	3.23	1.65	0.96	0.60	0.40	0.21
			4.59	1.94	0.99	0.57	0.36	0.24	0.12
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.6	TR18/b=1060mm	L/150 L/200 L/300 L/500	7.98	4.49	2.87	2.00	1.47	1.12	0.72
	5.58		7.98	4.49	2.87	2.00	1.45	0.97	0.50
	TR18/b=795mm		7.98	4.49	2.87	1.72	1.08	0.73	0.37
	5.95		7.98	3.88	1.98	1.15	0.72	0.48	0.25
			5.51	2.33	1.19	0.69	0.43	0.29	0.15
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.7	TR18/b=1060mm	L/150 L/200 L/300 L/500	9.27	5.22	3.34	2.32	1.70	1.30	0.83
	6.51		9.27	5.22	3.34	2.32	1.69	1.13	0.58
	TR18/b=795mm		9.27	5.22	3.34	2.01	1.27	0.85	0.43
	6.94		9.27	4.52	2.32	1.34	0.84	0.57	0.29
			6.43	2.71	1.39	0.80	0.51	0.34	0.17
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.75	TR18/b=1060mm	L/150 L/200 L/300 L/500	9.92	5.58	3.57	2.48	1.82	1.39	0.89
	6.97		9.92	5.58	3.57	2.48	1.81	1.21	0.62
	TR18/b=795mm		9.92	5.58	3.57	2.15	1.36	0.91	0.47
	7.44		9.92	4.85	2.48	1.44	0.90	0.61	0.31
			6.89	2.91	1.49	0.86	0.54	0.36	0.19
t lima [mm]	g [kg/m2]	L= {m}	0.75	1	1.25	1.5	1.75	2	2.5
0.8	TR18/b=1060mm	L/150 L/200 L/300 L/500	10.56	5.94	3.80	2.64	1.94	1.48	0.95
	7.44		10.56	5.94	3.80	2.64	1.93	1.29	0.66
	TR18/b=795mm		10.56	5.94	3.80	2.30	1.45	0.97	0.50
	7.93		10.56	5.17	2.65	1.53	0.96	0.65	0.33
			7.35	3.10	1.59	0.92	0.58	0.39	0.20