

Fasadni profilisani lim TR35

Profil namenjen pokrivanju i oblaganju objekata.

Product is in conformity with the provisions of EC directive 89/106/EEC (Construction Products Directive) and that the harmonized standard referenced below has been applied: EN 14782:2006




INM
profiled
plates
www.inm-arilje.com



Može se
savijati lučno

TEHNIČKI PARAMETRI:

Ulazna širina trake: 1.250 mm
Pokrivna širina: 1.100 mm
Dužina: do 13.500 mm
Kvalitet trake: DX51D, S280GD, po standardu EN10346
Nanos cinka: Z100, Z140, Z220, Z275 po standardu EN10346
Vrste premaza: SP15, SP25, SP35, PVDF25, PVDF35 po standardu EN10169
Protivpožarni atest: A1 po stanardu EN13501-1
Debljine materijala: 0,50, 0,60, 0,70, 0,75, 0,88, 1,25 mm po standardu EN10143
Po potrebi izrađuje se od Al legura kao i od TiZn materijala.
Standardne boje: RAL 9002, 9006, 9007, 3009, 5010, 8019, 6028, 7016, 9005DM, 7016DM, 8017DM

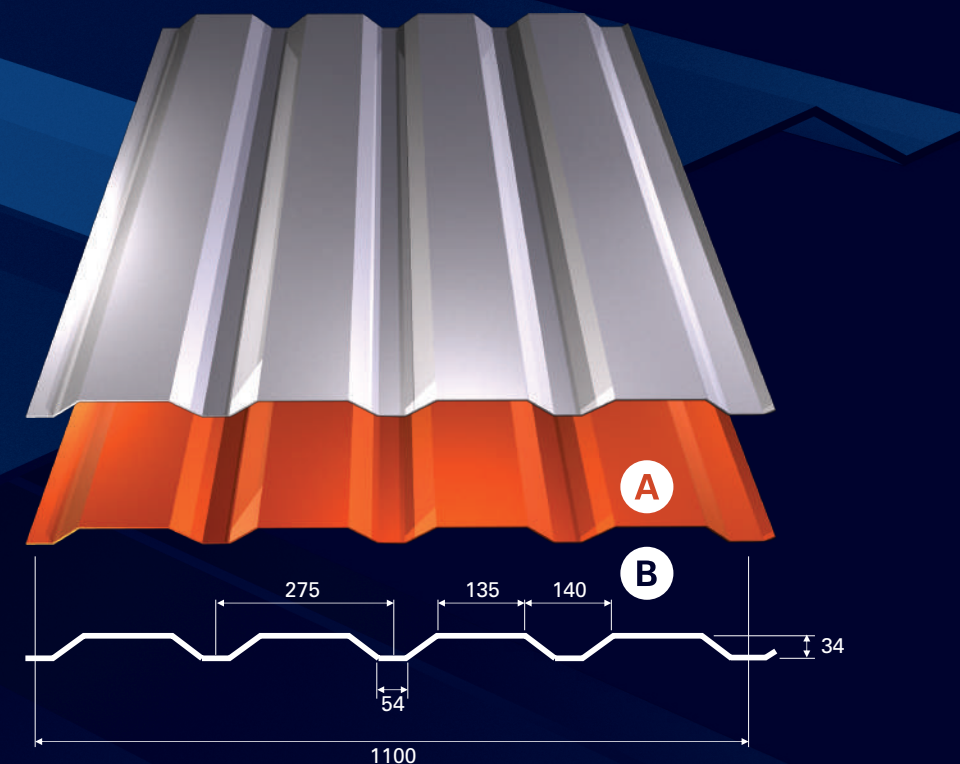

prilikom porudžbine navesti koja će strana biti spoljašnja (A ili B)




Lučno profilisani lim

Lučno savijeni profilisani lim TR-35 koristi se za pokrivanje lučnih krovova.

Dizajniran je da poboljša izgled krovova, fasada, svodova i drugih detalja na objektima.

Lučno savijanje profilisanog lima vrši se na objektu prema projektovanom radijusu.

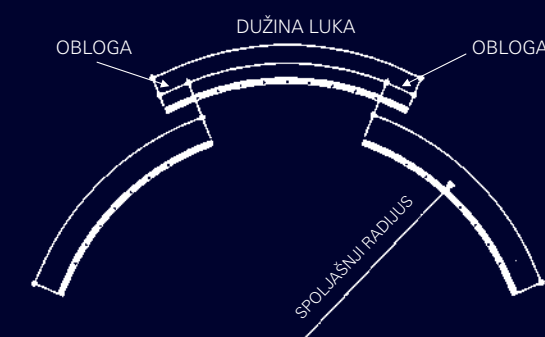



DVA OSOLONCA, dopuštena nosivost (kN/m²)

t lima [mm]	g [kg/m2]	k	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00
0.50	4.6	1	3.82	2.45	1.70	1.25	0.96	0.76	0.61	0.51	0.42	0.36	0.31	0.27	0.24
		2	3.82	2.45	1.70	1.25	0.93	0.66	0.49	0.37	0.29	0.23	0.19	0.15	0.13
		3	3.82	2.45	1.70	1.06	0.72	0.52	0.38	0.29	0.23	0.18	0.15	0.12	0.10
		4	3.71	1.96	1.16	0.75	0.51	0.36	0.27	0.20	0.16	0.13	0.10	0.80	0.70
0.63	5.4	1	5.66	3.62	2.52	1.85	1.42	1.12	0.91	0.75	0.63	0.54	0.46	0.40	0.35
		2	5.66	3.62	2.52	1.85	1.27	0.91	0.67	0.51	0.40	0.32	0.26	0.21	0.18
		3	5.66	3.62	2.26	1.46	0.99	0.71	0.52	0.40	0.31	0.25	0.20	0.16	0.14
		4	5.10	2.68	1.59	1.02	0.70	0.50	0.37	0.28	0.22	0.17	0.14	0.12	0.10
0.75	6.8	1	7.42	4.75	3.30	2.42	1.66	1.47	1.19	0.98	0.82	0.70	0.61	0.53	0.46
		2	7.42	4.75	3.30	2.36	1.61	1.15	0.89	0.65	0.51	0.40	0.33	0.27	0.22
		3	7.42	4.75	2.87	1.84	1.26	0.90	0.66	0.51	0.39	0.31	0.25	0.21	0.17
		4	6.46	3.40	2.02	1.30	0.89	0.63	0.47	0.36	0.28	0.22	0.18	0.15	0.12
1.00	9.1	1	11.70	7.49	5.20	3.82	2.92	2.31	1.87	1.55	1.30	1.11	0.95	0.83	0.73
		2	11.70	7.49	5.20	3.47	2.37	1.69	1.25	0.95	0.74	0.59	0.48	0.39	0.33
		3	11.70	7.10	4.22	2.71	1.85	1.32	0.98	0.74	0.58	0.46	0.37	0.31	0.25
		4	9.49	5.01	2.97	1.91	1.30	0.93	0.69	0.52	0.41	0.32	0.26	0.21	0.18
1.25	11.4	1	16.32	10.45	7.26	5.33	4.08	3.22	2.61	2.16	1.81	1.55	1.33	1.16	1.02
		2	16.32	10.45	7.26	4.67	3.19	2.27	1.68	1.28	1.00	0.79	0.64	0.52	0.44
		3	16.32	9.56	5.67	3.64	3.48	1.77	1.31	1.00	0.77	0.61	0.49	0.40	0.33
		4	12.75	6.73	3.99	2.56	1.74	1.24	0.91	0.68	0.52	0.41	0.33	0.27	0.22

TRI OSOLONCA, dopuštena nosivost (kN/m²)

t lima [mm]	g [kg/m2]	k	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00
0.50	4.6	1	1.89	1.36	1.04	0.82	0.66	0.55	0.46	0.39	0.34	0.30	0.26	0.23	0.21
		2	1.89	1.36	1.04	0.82	0.66	0.55	0.46	0.39	0.34	0.30	0.26	0.23	0.21
		3	1.89	1.36	1.04	0.82	0.66	0.55	0.46	0.39	0.34	0.30	0.26	0.23	0.21
		4	1.89	1.36	1.04	0.82	0.66	0.55	0.46	0.39	0.34	0.30	0.25	0.20	0.17
0.63	5.4	1	3.13	2.26	1.72	1.35	1.10	0.91	0.76	0.65	0.56	0.49	0.43	0.38	0.34
		2	3.13	2.26	1.72	1.35	1.10	0.91	0.76	0.65	0.56	0.49	0.43	0.38	0.34
		3	3.13	2.26	1.72	1.35	1.10	0.91	0.76	0.65	0.56	0.49	0.43	0.38	0.33
		4	3.13	2.26	1.72	1.35	1.10	0.91	0.76	0.65	0.53	0.42	0.34	0.28	0.23
0.75	6.8	1	4.31	3.09	2.34	1.83	1.48	1.22	1.02	0.87	0.75	0.66	0.58	0.51	0.46
		2	4.31	3.09	2.34	1.83	1.48	1.22	1.02	0.87	0.75	0.66	0.58	0.51	0.46
		3	4.31	3.09	2.34	1.83	1.48	1.22	1.02	0.87	0.75	0.66	0.58	0.50	0.42
		4	4.31	3.09	2.34	1.83	1.48	1.22	1.02	0.86	0.67	0.53	0.43	0.35	0.29
1.00	9.1	1	7.20	5.12	3.84	2.99	2.40	1.97	1.65	1.40	1.20	1.40	0.92	0.81	0.72
		2	7.20	5.12	3.84	2.99	2.40	1.97	1.65	1.40	1.20	1.40	0.92	0.81	0.72
		3	7.20	5.12	3.84	2.99	2.40	1.97	1.65	1.40	1.20	1.40	0.89	0.73	0.60
		4	7.20	5.12	3.84	2.99	2.40	1.97	1.64	1.24	0.96	0.76	0.62	0.50	0.42
1.25	11.4	1	10.59	7.48	5.58	4.33	3.46	2.83	2.36	2.00	1.72	1.49	1.31	1.15	1.01
		2	10.59	7.48	5.58	4.33	3.46	2.83	2.36	2.00	1.72	1.49	1.31	1.15	1.01
		3	10.59	7.48	5.58	4.33	3.46	2.83	2.36	2.00	1.72	1.49	1.17	0.96	0.79
		4	10.59	7.48	5.58	4.33	3.46	2.83	2.15	1.63	1.26	0.99	0.80	0.65	0.53



ČETIRI OSOLONCA, dopuštena nosivost (kN/m²)

t lima [mm]	g [kg/m2]	k	1.00	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00
0.50	4.6	1	2.23	1.62	1.24	0.98	0.80	0.66	0.56	0.48	0.41	0.36	0.33	0.28	0.25
		2	2.23	1.62	1.24	0.98	0.80	0.66	0.56	0.48	0.41	0.36	0.33	0.28	0.25
		3	2.23	1.62	1.24	0.98	0.80	0.66	0.56	0.48	0.41	0.35	0.28	0.23	0.19
		4	2.23	1.62	1.24	0.98	0.80	0.66	0.52	0.39	0.31	0.24	0.20	0.16	0.13
0.60	5.4	1	3.71	2.69	2.05	1.62	1.32	1.09	0.92	0.79	0.68	0.60	0.53	0.47	0.42
		2	3.71	2.69	2.05	1.62	1.32	1.09	0.92	0.79	0.68	0.60	0.49	0.40	0.34
		3	3.71	2.69	2.05	1.62	1.32	1.09	0.92	0.77	0.60	0.48	0.38	0.32	0.26
		4	3.71	2.69	2.05	1.62	1.32	0.96	0.71	0.54	0.42	0.33	0.27	0.22	0.18
0.75	6.8	1	5.12	3.69	2.80	2.21	1.78	1.47	1.24	1.06	0.91	0.80	0.70	0.62	0.56
		2	5.12	3.69	2.80	2.21	1.78	1.47	1.24	1.06	0.91	0.77	0.62	0.51	0.42
		3	5.12	3.69	2.80	2.21	1.78	1.47	1.24	0.97	0.76	0.60	0.48	0.40	0.33
		4	5.12	3.69	2.80	2.21	1.70	1.21	0.90	0.68	0.53	0.42	0.34	0.28	0.23
1.00	9.1	1	8.56	6.13	4.62	3.61	2.91	2.39	2.00	1.70	1.47	1.28	1.12	0.99	0.88
		2	8.56	6.13	4.62	3.61	2.91	2.39	2.00	1.70	1.42	1.13	0.91	0.75	0.62
		3	8.56	6.13	4.62	3.61	2.91	2.39	1.86	1.41	1.10	0.87	0.70	0.58	0.48
		4	8.56	6.13	4.62	3.61	2.91	1.76	1.30	0.99	0.77	0.61	0.49	0.40	0.33
1.25	11.4	1	12.61	8.96	6.71	5.23	4.19	3.44	2.87	2.44	2.09	1.82	1.60	1.41	1.26
		2	12.61	8.96	6.71	5.23	4.19	3.44	2.47	2.42	1.88	1.49	1.21	0.99	0.82
		3	12.61	8.96	6.71	5.23	4.19	3.35	2.47	1.88	1.46	1.16	0.93	0.76	0.63
		4	12.61	8.96	6.71	4.83	3.28	2.34	1.72	1.30	1.00	0.79	0.63	0.51	0.42

